

# TurboTwinJet® TWIN FLAT SPRAY



BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**GOOD**  
CONTACT  
**EXCELLENT**  
SYSTEMIC  
**VERY GOOD**



**FUNGICIDE**  
CONTACT  
**EXCELLENT**  
SYSTEMIC  
**VERY GOOD**



**INSECTICIDE**  
CONTACT  
**EXCELLENT**  
SYSTEMIC  
**VERY GOOD**



**DRIFT CONTROL**  
**VERY GOOD**




**PWM APPROVED**




## FEATURES

- Dual outlet design produces two 110° flat fan spray patterns using the patented technology from the Turbo TeeJet® nozzle. The angle between each spray pattern is 60° forward and back.
- Best suited for broadcast spraying where superior leaf coverage and canopy penetration is important.
- Droplet size range is slightly larger than the same capacity Turbo TeeJet nozzle providing drift-reducing properties with increased canopy coverage and penetration.
- Available in eight VisiFlo® Polymer (VP) capacities.
- For replacement, use the automatic alignment Quick TeeJet cap and gasket 114441A-\*-CELR. See page 118 for additional information.

## SPRAY PATTERN



## DROPLET SIZE CLASSIFICATION



## OPTIMUM SPRAY HEIGHT

	50 cm SPACING 
<b>ANGLE</b>	<b>HEIGHT</b>
110°	50 cm

## RECOMMENDED PRESSURE RANGE



## MATERIALS AVAILABLE



## HOW TO ORDER

Polymer with VisiFlo color-coding  
**T T J 6 0 - 1 1 0 0 4 V P**  
 Tip Type      Spray Angle      Capacity Size      Material Code

Polymer with VisiFlo color-coding, includes Quick TeeJet cap and gasket\*  
**T T J 6 0 - 1 1 0 0 3 V P - C E**  
 Tip Type      Spray Angle      Capacity Size      Material Code      Cap and Gasket Included

\*Reference page 118 for more caps information.

# TurboTwinJet® TWIN FLAT SPRAY




BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING												
				l/ha												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
TTJ60-11002 (100)	1.5	C	0.56	168	134	112	96.0	84.0	67.2	56.0	42.0	37.3	33.6	26.9	22.4	19.2
	2.0	C	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	3.0	M	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	4.0	M	0.91	273	218	182	156	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2
	5.0	M	1.02	306	245	204	175	153	122	102	76.5	68.0	61.2	49.0	40.8	35.0
TTJ60-110025 (100)	1.5	VC	0.70	210	168	140	120	105	84.0	70.0	52.5	46.7	42.0	33.6	28.0	24.0
	2.0	C	0.81	243	194	162	139	122	97.2	81.0	60.8	54.0	48.6	38.9	32.4	27.8
	3.0	C	0.99	297	238	198	170	149	119	99.0	74.3	66.0	59.4	47.5	39.6	33.9
	4.0	M	1.14	342	274	228	195	171	137	114	85.5	76.0	68.4	54.7	45.6	39.1
	5.0	M	1.28	384	307	256	219	192	154	128	96.0	85.3	76.8	61.4	51.2	43.9
TTJ60-11003 (100)	1.5	VC	0.83	249	199	166	142	125	99.6	83.0	62.3	55.3	49.8	39.8	33.2	28.5
	2.0	C	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	3.0	C	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	4.0	M	1.36	408	326	272	233	204	163	136	102	90.7	81.6	65.3	54.4	46.6
	5.0	M	1.52	456	365	304	261	228	182	152	114	101	91.2	73.0	60.8	52.1
TTJ60-11005 (50)	1.5	VC	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
	2.0	C	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	3.0	C	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	4.0	M	1.82	546	437	364	312	273	218	182	137	121	109	87.4	72.8	62.4
	5.0	M	2.04	612	490	408	350	306	245	204	153	136	122	97.9	81.6	69.9
TTJ60-11005 (50)	1.5	VC	1.39	417	334	278	238	209	167	139	104	92.7	83.4	66.7	55.6	47.7
	2.0	C	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2
	3.0	C	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5
	4.0	M	2.27	681	545	454	389	341	272	227	170	151	136	109	90.8	77.8
	5.0	M	2.54	762	610	508	435	381	305	254	191	169	152	122	102	87.1
TTJ60-11006 (50)	1.5	VC	1.68	504	403	336	288	252	202	168	126	112	101	80.6	67.2	57.6
	2.0	C	1.94	582	466	388	333	291	233	194	146	129	116	93.1	77.6	66.5
	3.0	C	2.37	711	569	474	406	356	284	237	178	158	142	114	94.8	81.3
	4.0	M	2.74	822	658	548	470	411	329	274	206	183	164	132	110	93.9
	5.0	M	3.06	918	734	612	525	459	367	306	230	204	184	147	122	105
TTJ60-11008 (50)	1.5	VC	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5
	2.0	C	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5
	3.0	C	3.16	948	758	632	542	474	379	316	237	211	190	152	126	108
	4.0	M	3.65	1095	876	730	626	548	438	365	274	243	219	175	146	125
	5.0	M	4.08	1224	979	816	699	612	490	408	306	272	245	196	163	140
TTJ60-11010 (50)	1.5	VC	2.79	837	670	558	478	419	335	279	209	186	167	134	112	95.7
	2.0	VC	3.23	969	775	646	554	485	388	323	242	215	194	155	129	111
	3.0	C	3.95	1185	948	790	677	593	474	395	296	263	237	190	158	135
	4.0	M	4.56	1368	1094	912	782	684	547	456	342	304	274	219	182	156
	5.0	M	5.10	1530	1224	1020	874	765	612	510	383	340	306	245	204	175
6.0	M	5.59	1677	1342	1118	958	839	671	559	419	373	335	268	224	192	

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.

## LERAP RATINGS

TIP & CAPACITY	PRESSURE (bar)	STAR RATING
TTJ60-110025	1.5–2.75	★★
TTJ60-11003	1.5–2.5	★★
TTJ60-11004	1.5–2.75	★★
TTJ60-11005	1.5–3.25	★★



# Air Induction Turbo TwinJet®

TWIN FLAT  
SPRAY



BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**VERY GOOD**  
CONTACT  
**VERY GOOD**  
SYSTEMIC  
**EXCELLENT**



**FUNGICIDE**  
CONTACT  
**GOOD**  
SYSTEMIC  
**EXCELLENT**



**INSECTICIDE**  
CONTACT  
**GOOD**  
SYSTEMIC  
**EXCELLENT**



**DRIFT CONTROL**  
**EXCELLENT**




**PWM APPROVED**




## FEATURES

- Dual tapered edge spray tip with air-induction technology.
- The combination of the dual symmetric 110° flat fan pattern and the 60° angle between spray pattern in addition to the greater number of droplets results in a superior crop coverage and penetration, while providing excellent drift control.
- Available in nine VisiFlo® Polymer (VP) capacities.
- Automatic spray alignment with Quick TeeJet cap and gasket 114443A-\*-CELR (02 to 06) or 114502A-\*-CELR (08 to 15). See page 118 for additional information.


## SPRAY PATTERN



## DROPLET SIZE CLASSIFICATION



## OPTIMUM SPRAY HEIGHT



## RECOMMENDED PRESSURE RANGE



## MATERIALS AVAILABLE



## HOW TO ORDER

Polymer with VisiFlo color-coding  
A I T T J 6 0 - 1 1 0 0 4 V P

Tip Type      Spray Angle      Capacity Size      Material Code

Polymer with VisiFlo color-coding, includes Quick TeeJet cap and gasket\*  
A I T T J 6 0 - 1 1 0 0 4 V P - C E

Tip Type      Spray Angle      Capacity Size      Material Code      Cap and Gasket Included

\*Reference page 118 for more caps information.

# Air Induction Turbo TwinJet®

TWIN FLAT  
SPRAY



BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING												
				l/ha												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
AITTJ60-11002VP (100)	1.5	XC	0.56	168	134	112	96.0	84.0	67.2	56.0	42.0	37.3	33.6	26.9	22.4	19.2
	2.0	VC	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	3.0	VC	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	4.0	C	0.91	273	218	182	156	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2
	5.0	C	1.02	306	245	204	175	153	122	102	76.5	68.0	61.2	49.0	40.8	35.0
6.0	M	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4	
AITTJ60-110025VP (100)	1.5	XC	0.70	210	168	140	120	105	84.0	70.0	52.5	46.7	42.0	33.6	28.0	24.0
	2.0	VC	0.81	243	194	162	139	122	97.2	81.0	60.8	54.0	48.6	38.9	32.4	27.8
	3.0	VC	0.99	297	238	198	170	149	119	99.0	74.3	66.0	59.4	47.5	39.6	33.9
	4.0	C	1.14	342	274	228	195	171	137	114	85.5	76.0	68.4	54.7	45.6	39.1
	5.0	C	1.28	384	307	256	219	192	154	128	96.0	85.3	76.8	61.4	51.2	43.9
6.0	C	1.40	420	336	280	240	210	168	140	105	93.3	84.0	67.2	56.0	48.0	
AITTJ60-11003VP (50)	1.5	XC	0.83	249	199	166	142	125	99.6	83.0	62.3	55.3	49.8	39.8	33.2	28.5
	2.0	XC	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	3.0	VC	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	4.0	C	1.36	408	326	272	233	204	163	136	102	90.7	81.6	65.3	54.4	46.6
	5.0	C	1.52	456	365	304	261	228	182	152	114	101	91.2	73.0	60.8	52.1
6.0	C	1.67	501	401	334	286	251	200	167	125	111	100	80.2	66.8	57.3	
AITTJ60-11004VP (50)	1.5	XC	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
	2.0	XC	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	3.0	VC	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	4.0	C	1.82	546	437	364	312	273	218	182	137	121	109	87.4	72.8	62.4
	5.0	C	2.04	612	490	408	350	306	245	204	153	136	122	97.9	81.6	69.9
6.0	C	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5	
AITTJ60-11005VP (50)	1.5	XC	1.39	417	334	278	238	209	167	139	104	92.7	83.4	66.7	55.6	47.7
	2.0	XC	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2
	3.0	VC	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5
	4.0	VC	2.27	681	545	454	389	341	272	227	170	151	136	109	90.8	77.8
	5.0	C	2.54	762	610	508	435	381	305	254	191	169	152	122	102	87.1
6.0	C	2.79	837	670	558	478	419	335	279	209	186	167	134	112	95.7	
AITTJ60-11006VP (50)	1.5	XC	1.68	504	403	336	288	252	202	168	126	112	101	80.6	67.2	57.6
	2.0	XC	1.94	582	466	388	333	291	233	194	146	129	116	93.1	77.6	66.5
	3.0	VC	2.37	711	569	474	406	356	284	237	178	158	142	114	94.8	81.3
	4.0	VC	2.74	822	658	548	470	411	329	274	206	183	164	132	110	93.9
	5.0	C	3.06	918	734	612	525	459	367	306	230	204	184	147	122	105
6.0	C	3.35	1005	804	670	574	503	402	335	251	223	201	161	134	115	
AITTJ60-11008VP (50)	1.5	UC	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5
	2.0	UC	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5
	3.0	XC	3.16	948	758	632	542	474	379	316	237	211	190	152	126	108
	4.0	XC	3.65	1095	876	730	626	548	438	365	274	243	219	175	146	125
	5.0	VC	4.08	1224	979	816	699	612	490	408	306	272	245	196	163	140
6.0	VC	4.47	1341	1073	894	766	671	536	447	335	298	268	215	179	153	
AITTJ60-11010VP (50)	1.5	UC	2.79	837	670	558	478	419	335	279	209	186	167	134	112	95.7
	2.0	UC	3.23	969	775	646	554	485	388	323	242	215	194	155	129	111
	3.0	XC	3.95	1185	948	790	677	593	474	395	296	263	237	190	158	135
	4.0	XC	4.56	1368	1094	912	782	684	547	456	342	304	274	219	182	156
	5.0	VC	5.10	1530	1224	1020	874	765	612	510	383	340	306	245	204	175
6.0	VC	5.59	1677	1342	1118	958	839	671	559	419	373	335	268	224	192	
AITTJ60-11015VP (50)	1.5	UC	4.19	1257	1006	838	718	629	503	419	314	279	251	201	168	144
	2.0	UC	4.83	1449	1159	966	828	725	580	483	362	322	290	232	193	166
	3.0	XC	5.92	1776	1421	1184	1015	888	710	592	444	395	355	284	237	203
	4.0	XC	6.84	2052	1642	1368	1173	1026	821	684	513	456	410	328	274	235
	5.0	VC	7.64	2292	1834	1528	1310	1146	917	764	573	509	458	367	306	262
6.0	VC	8.37	2511	2009	1674	1435	1256	1004	837	628	558	502	402	335	287	

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.

## LERAP RATINGS

TIP & CAPACITY	PRESSURE (bar)	STAR RATING	TIP & CAPACITY	PRESSURE (bar)	STAR RATING
AITTJ60-11002	1.5–2.25	★★★★	AITTJ60-11004	1.5–4.0	★★★★
	2.26–4.0	★★★		4.01–5.0	★★★
AITTJ60-110025	1.5–2.5	★★★★	AITTJ60-11005	1.5–5.0	★★★★
	2.51–4.0	★★★			
AITTJ60-11003	1.5–2.0	★★★★			
	2.01–4.5	★★★			

Visit [www.teejet.com](http://www.teejet.com) for updated charts.

# AI3070

## AIR INDUCTION DUAL PATTERN FLAT SPRAY

BROADCAST NOZZLES

### Typical Applications



**FUNGICIDE**  
CONTACT  
**EXCELLENT**  
SYSTEMIC  
**VERY GOOD**




**DRIFT CONTROL**  
**VERY GOOD**




### FEATURES

- Provides excellent penetration and seed head coverage for fungicide spraying on cereal crops.
- AI3070 produces two wide angle, flat spray patterns for uniform coverage in broadcast applications.
- 30° forward tilted spray penetrates dense crop canopies, while the backward tilted 70° spray maximizes coverage of the crop seed head.
- Drift resistant droplets are produced through the use of a Venturi air aspirator.
- Available in six VisiFlo® Polymer (VP) capacities.
- Due to the spray tip design, the boom height must be reduced when compared to other flat spray tips (see table below).
- Removable pre-orifice for fast and easy cleaning.
- Automatic spray alignment with Quick TeeJet cap and gasket 98579-1-NYR. Reference page 118 for more information.

### SPRAY PATTERN



### DROPLET SIZE CLASSIFICATION



### OPTIMUM SPRAY HEIGHT

 HEIGHT	 HEIGHT
30 cm	50 cm

### RECOMMENDED PRESSURE RANGE



1.5–6 bar

### MATERIALS AVAILABLE



POLYMER

### HOW TO ORDER

Polymer with VisiFlo color-coding

**A I 3 0 7 0 - 0 4 V P**

Tip Type

Capacity Size

Material Code

Polymer with VisiFlo color-coding, includes Quick TeeJet cap and gasket\*

**A I 3 0 7 0 - 0 3 V P - C**

Tip Type

Capacity Size

Material Code

Cap and Gasket Included

\*Reference page 118 for more caps information.

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING												
				l/ha												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
AI3070-015VP (100)	1.5	VC	0.42	126	101	84.0	72.0	63.0	50.4	42.0	31.5	28.0	25.2	20.2	16.8	14.4
	2.0	VC	0.48	144	115	96.0	82.3	72.0	57.6	48.0	36.0	32.0	28.8	23.0	19.2	16.5
	3.0	C	0.59	177	142	118	101	88.5	70.8	59.0	44.3	39.3	35.4	28.3	23.6	20.2
	4.0	C	0.68	204	163	136	117	102	81.6	68.0	51.0	45.3	40.8	32.6	27.2	23.3
	5.0	M	0.76	228	182	152	130	114	91.2	76.0	57.0	50.7	45.6	36.5	30.4	26.1
	6.0	M	0.83	249	199	166	142	125	99.6	83.0	62.3	55.3	49.8	39.8	33.2	28.5
AI3070-02VP (100)	1.5	XC	0.56	168	134	112	96.0	84.0	67.2	56.0	42.0	37.3	33.6	26.9	22.4	19.2
	2.0	VC	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	3.0	C	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	4.0	C	0.91	273	218	182	156	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2
	5.0	M	1.02	306	245	204	175	153	122	102	76.5	68.0	61.2	49.0	40.8	35.0
	6.0	M	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
AI3070-025VP (100)	1.5	XC	0.70	210	168	140	120	105	84.0	70.0	52.5	46.7	42.0	33.6	28.0	24.0
	2.0	VC	0.81	243	194	162	139	122	97.2	81.0	60.8	54.0	48.6	38.9	32.4	27.8
	3.0	VC	0.99	297	238	198	170	149	119	99.0	74.3	66.0	59.4	47.5	39.6	33.9
	4.0	C	1.14	342	274	228	195	171	137	114	85.5	76.0	68.4	54.7	45.6	39.1
	5.0	C	1.28	384	307	256	219	192	154	128	96.0	85.3	76.8	61.4	51.2	43.9
	6.0	M	1.40	420	336	280	240	210	168	140	105	93.3	84.0	67.2	56.0	48.0
AI3070-03VP (50)	1.5	XC	0.83	249	199	166	142	125	99.6	83.0	62.3	55.3	49.8	39.8	33.2	28.5
	2.0	XC	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	3.0	VC	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	4.0	C	1.36	408	326	272	233	204	163	136	102	90.7	81.6	65.3	54.4	46.6
	5.0	C	1.52	456	365	304	261	228	182	152	114	101	91.2	73.0	60.8	52.1
	6.0	C	1.67	501	401	334	286	251	200	167	125	111	100	80.2	66.8	57.3
AI3070-04VP (50)	1.5	XC	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
	2.0	XC	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	3.0	VC	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	4.0	VC	1.82	546	437	364	312	273	218	182	137	121	109	87.4	72.8	62.4
	5.0	C	2.04	612	490	408	350	306	245	204	153	136	122	97.9	81.6	69.9
	6.0	C	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5
AI3070-05VP (50)	1.5	UC	1.39	417	334	278	238	209	167	139	104	92.7	83.4	66.7	55.6	47.7
	2.0	XC	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2
	3.0	VC	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5
	4.0	VC	2.27	681	545	454	389	341	272	227	170	151	136	109	90.8	77.8
	5.0	C	2.54	762	610	508	435	381	305	254	191	169	152	122	102	87.1
	6.0	C	2.79	837	670	558	478	419	335	279	209	186	167	134	112	95.7

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.

### LERAP RATINGS

TIP & CAPACITY	PRESSURE (bar)	STAR RATING
AI3070-015VP	1.5–2.0	★★
AI3070-02VP	1.5–2.0	★★
AI3070-025VP	1.5–3.0	★★
AI3070-03VP	1.5–3.0	★★
AI3070-04VP	1.5–2.0	★★★
	2.5–5.0	★★
AI3070-05VP	1.5–4.0	★★★
	4.5–6.0	★★



# TwinJet® TWIN FLAT SPRAY



BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
CONTACT  
**EXCELLENT**



**FUNGICIDE**  
CONTACT  
**EXCELLENT**



**INSECTICIDE**  
CONTACT  
**EXCELLENT**




**PWM APPROVED**




## FEATURES

- Penetrates crop residue or dense foliage.
- Smaller droplets for thorough coverage.
- Better spray distribution along boom than with hollow cone nozzles.
- Available in stainless steel with VisiFlo® color-coding in 65°, 80° and 110° spray angles.
- See pages 70–71 for TwinJet even flat spray tips.
- Automatic spray alignment with 114443A-\*-CELRL Quick TeeJet® cap and gasket. Reference page 118 for more information.

## SPRAY PATTERN



## DROPLET SIZE CLASSIFICATION



## OPTIMUM SPRAY HEIGHT

ANGLE	HEIGHT
65°	90 cm
80°	75 cm
110°	50 cm

## RECOMMENDED PRESSURE RANGE




## MATERIALS AVAILABLE

**VS** STAINLESS STEEL

## HOW TO ORDER

Stainless Steel with VisiFlo color-coding

**T J 6 0 - 8 0 0 2 V S**





BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE		CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING												
		80°	110°		l/ha												
					4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
TJ60-6501 TJ60-8001 (100)	2.0	F		0.32	96.0	76.8	64.0	54.9	48.0	38.4	32.0	24.0	21.3	19.2	15.4	12.8	11.0
	2.5	F		0.36	108	86.4	72.0	61.7	54.0	43.2	36.0	27.0	24.0	21.6	17.3	14.4	12.3
	3.0	VF		0.39	117	93.6	78.0	66.9	58.5	46.8	39.0	29.3	26.0	23.4	18.7	15.6	13.4
	3.5	VF		0.42	126	101	84.0	72.0	63.0	50.4	42.0	31.5	28.0	25.2	20.2	16.8	14.4
TJ60-650134 (100)	2.0			0.43	129	103	86.0	73.7	64.5	51.6	43.0	32.3	28.7	25.8	20.6	17.2	14.7
	2.5			0.48	144	115	96.0	82.3	72.0	57.6	48.0	36.0	32.0	28.8	23.0	19.2	16.5
	3.0			0.53	159	127	106	90.9	79.5	63.6	53.0	39.8	35.3	31.8	25.4	21.2	18.2
	3.5			0.57	171	137	114	97.7	85.5	68.4	57.0	42.8	38.0	34.2	27.4	22.8	19.5
TJ60-6502 TJ60-8002 TJ60-11002 (100)	2.0	F	F	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	2.5	F	F	0.72	216	173	144	123	108	86.4	72.0	54.0	48.0	43.2	34.6	28.8	24.7
	3.0	F	F	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	3.5	F	F	0.85	255	204	170	146	128	102	85.0	63.8	56.7	51.0	40.8	34.0	29.1
TJ60-6503 TJ60-8003 TJ60-11003 (100)	2.0	F	F	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	2.5	F	F	1.08	324	259	216	185	162	130	108	81.0	72.0	64.8	51.8	43.2	37.0
	3.0	F	F	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	3.5	F	F	1.27	381	305	254	218	191	152	127	95.3	84.7	76.2	61.0	50.8	43.5
TJ60-6504 TJ60-8004 TJ60-11004 (50)	2.0	F	F	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	2.5	F	F	1.44	432	346	288	247	216	173	144	108	96.0	86.4	69.1	57.6	49.4
	3.0	F	F	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	3.5	F	F	1.71	513	410	342	293	257	205	171	128	114	103	82.1	68.4	58.6
TJ60-8005 TJ60-11005 (50)	2.0	M	M	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2
	2.5	M	M	1.80	540	432	360	309	270	216	180	135	120	108	86.4	72.0	61.7
	3.0	M	M	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5
	3.5	F	F	2.13	639	511	426	365	320	256	213	160	142	128	102	85.2	73.0
TJ60-6506 TJ60-8006 TJ60-11006 (50)	2.0	M	M	1.94	582	466	388	333	291	233	194	146	129	116	93.1	77.6	66.5
	2.5	M	M	2.16	648	518	432	370	324	259	216	162	144	130	104	86.4	74.1
	3.0	M	M	2.37	711	569	474	406	356	284	237	178	158	142	114	94.8	81.3
	3.5	M	M	2.56	768	614	512	439	384	307	256	192	171	154	123	102	87.8
TJ60-6508 TJ60-8008 TJ60-11008 (50)	2.0	M	M	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5
	2.5	M	M	2.88	864	691	576	494	432	346	288	216	192	173	138	115	98.7
	3.0	M	M	3.16	948	758	632	542	474	379	316	237	211	190	152	126	108
	3.5	M	M	3.41	1023	818	682	585	512	409	341	256	227	205	164	136	117
TJ60-8010 TJ60-11010 (50)	2.0	M	M	3.23	969	775	646	554	485	388	323	242	215	194	155	129	111
	2.5	M	M	3.61	1083	866	722	619	542	433	361	271	241	217	173	144	124
	3.0	M	M	3.95	1185	948	790	677	593	474	395	296	263	237	190	158	135
	3.5	M	M	4.27	1281	1025	854	732	641	512	427	320	285	256	205	171	146
	4.0	M	M	4.56	1368	1094	912	782	684	547	456	342	304	274	219	182	156

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.





# DG TwinJet® DRIFT GUARD TWIN FLAT SPRAY

BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**VERY GOOD**  
CONTACT  
**VERY GOOD**  
SYSTEMIC  
**VERY GOOD**



**FUNGICIDE**  
CONTACT  
**VERY GOOD**  
SYSTEMIC  
**EXCELLENT**



**INSECTICIDE**  
CONTACT  
**VERY GOOD**  
SYSTEMIC  
**EXCELLENT**



**FERTILIZER**  
BROADCAST  
**GOOD**




**DRIFT CONTROL**  
**GOOD**




## FEATURES

- Dual 110°, tapered edge, flat fan spray patterns spraying 60° forward to back providing better canopy coverage and penetration in broadcast spraying applications.
- DG TwinJet offers larger droplets and improved drift control compared to a standard twin flat spray tip of equal capacity.
- Removable polymer pre-orifice.



## SPRAY PATTERN



## DROPLET SIZE CLASSIFICATION



## OPTIMUM SPRAY HEIGHT

 ANGLE	50 cm SPACING  HEIGHT
110°	50 cm

## RECOMMENDED PRESSURE RANGE



## MATERIALS AVAILABLE

**VS** STAINLESS STEEL

## HOW TO ORDER

Stainless Steel with VisiFlo® color-coding

D G T J 6 0 - 1 1 0 0 4 V S

Tip Type

Spray Angle

Capacity Size

Material Code

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING												
				l/ha												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
DGTJ60-110015 (100)	2.0	M	0.48	144	115	96.0	82.3	72.0	57.6	48.0	36.0	32.0	28.8	23.0	19.2	16.5
	2.5	M	0.54	162	130	108	92.6	81.0	64.8	54.0	40.5	36.0	32.4	25.9	21.6	18.5
	3.0	F	0.59	177	142	118	101	88.5	70.8	59.0	44.3	39.3	35.4	28.3	23.6	20.2
	3.5	F	0.64	192	154	128	110	96.0	76.8	64.0	48.0	42.7	38.4	30.7	25.6	21.9
	4.0	F	0.76	228	182	152	130	114	91.2	76.0	57.0	50.7	45.6	36.5	30.4	26.1
DGTJ60-11002 (100)	2.0	M	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	2.5	M	0.72	216	173	144	123	108	86.4	72.0	54.0	48.0	43.2	34.6	28.8	24.7
	3.0	M	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	3.5	M	0.85	255	204	170	146	128	102	85.0	63.8	56.7	51.0	40.8	34.0	29.1
	4.0	M	0.91	273	245	182	175	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2
DGTJ60-11003 (100)	2.0	M	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	2.5	M	1.08	324	259	216	185	162	130	108	81.0	72.0	64.8	51.8	43.2	37.0
	3.0	M	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	3.5	M	1.27	381	305	254	218	191	152	127	95.3	84.7	76.2	61.0	50.8	43.5
	4.0	M	1.36	408	365	272	261	204	163	136	102	90.7	81.6	65.3	54.4	46.6
DGTJ60-11004 (50)	2.0	C	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	2.5	C	1.44	432	346	288	247	216	173	144	108	96.0	86.4	69.1	57.6	49.4
	3.0	C	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	3.5	M	1.71	513	410	342	293	257	205	171	128	114	103	82.1	68.4	58.6
	4.0	M	1.82	546	490	364	350	273	218	182	137	121	109	87.4	72.8	62.4
DGTJ60-11006 (50)	2.0	C	1.94	582	386	388	276	291	233	194	146	129	116	93.1	77.6	66.5
	2.5	C	1.80	540	432	360	309	270	216	180	135	120	108	86.4	72.0	61.7
	3.0	C	2.37	711	473	474	338	356	284	237	178	158	142	114	94.8	81.3
	3.5	M	2.56	768	614	512	439	384	307	256	192	171	154	123	102	87.8
	4.0	M	2.74	822	610	548	435	411	329	274	206	183	164	132	110	93.9
DGTJ60-11008 (50)	2.0	C	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5
	2.5	C	2.88	864	691	576	494	432	346	288	216	192	173	138	115	98.7
	3.0	C	3.16	948	758	632	642	474	379	316	237	211	190	152	126	108
	3.5	M	3.41	1023	818	682	585	512	409	341	256	227	205	164	136	117
	4.0	M	3.65	1095	876	730	626	548	438	365	274	243	219	175	146	125

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.



# Turbo FloodJet® WIDE ANGLE FLAT SPRAY

BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**EXCELLENT**  
SYSTEMIC  
**VERY GOOD**



**FERTILIZER**  
BROADCAST  
**VERY GOOD**




**DRIFT CONTROL**  
**EXCELLENT**




## FEATURES

- Excellent spray distribution for uniform coverage along the boom.
- Spray tip design incorporates a pre-orifice to produce larger droplets for less drift.
- Large, round orifice reduces clogging.
- Available in seven VisiFlo® Stainless Steel (VS) and seven VisiFlo Polymer (VP) capacities.
- Can be used with 114445A-\*-CELR Quick TeeJet® cap and gasket for automatic alignment. Reference page 118 for more information.

## SPRAY PATTERN



## DROPLET SIZE CLASSIFICATION



## OPTIMUM SPRAY HEIGHT

HEIGHT	SPACING
60 cm*	50 cm
75 cm*	75 cm
100 cm*	100 cm

\*Wide angle spray nozzle height is influenced by nozzle orientation. The critical factor is to achieve a minimum 30% overlap.

## RECOMMENDED PRESSURE RANGE



## MATERIALS AVAILABLE

**VS** STAINLESS STEEL

**VP** POLYMER

## HOW TO ORDER

Stainless Steel with VisiFlo color-coding

T F - V S 4

Tip Type | Material Code | Capacity Size

Polymer with VisiFlo color-coding

T F - V P 4

Tip Type | Material Code | Capacity Size

# Turbo FloodJet® WIDE ANGLE FLAT SPRAY

BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE		CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 75 cm SPRAY TIP SPACING								APPLICATION RATE FOR 100 cm SPRAY TIP SPACING							
		VS	VP		l/ha								l/ha							
					4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h	4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h
TF-12 (50)	1.0	UC	XC	0.91	182	121	91.0	72.8	60.7	45.5	36.4	29.1	137	91.0	68.3	54.6	45.5	34.1	27.3	21.8
	1.5	UC	XC	1.11	222	148	111	88.8	74.0	55.5	44.4	35.5	167	111	83.3	66.6	55.5	41.6	33.3	26.6
	2.0	XC	VC	1.29	258	172	129	103	86.0	64.5	51.6	41.3	194	129	96.8	77.4	64.5	48.4	38.7	31.0
	2.5	VC	VC	1.44	288	192	144	115	96.0	72.0	57.6	46.1	216	144	108	86.4	72.0	54.0	43.2	34.6
TF-12.5 (50)	1.0	UC	XC	1.14	228	152	114	91.2	76.0	57.0	45.6	36.5	171	114	85.5	68.4	57.0	42.8	34.2	27.4
	1.5	UC	XC	1.40	280	187	140	112	93.3	70.0	56.0	44.8	210	140	105	84.0	70.0	52.5	42.0	33.6
	2.0	XC	VC	1.61	322	215	161	129	107	80.5	64.4	51.5	242	161	121	96.6	80.5	60.4	48.3	38.6
	2.5	VC	VC	1.80	360	240	180	144	120	90.0	72.0	57.6	270	180	135	108	90.0	67.5	54.0	43.2
TF-13 (50)	1.0	UC	XC	1.37	274	183	137	110	91.3	68.5	54.8	43.8	206	137	103	82.2	68.5	51.4	41.1	32.9
	1.5	UC	XC	1.68	336	224	168	134	112	84.0	67.2	53.8	252	168	126	101	84.0	63.0	50.4	40.3
	2.0	XC	VC	1.94	388	259	194	155	129	97.0	77.6	62.1	291	194	146	116	97.0	72.8	58.2	46.6
	2.5	XC	VC	2.17	434	289	217	174	145	109	86.8	69.4	326	217	163	130	109	81.4	65.1	52.1
TF-14 (50)	1.0	UC	UC	1.82	364	243	182	146	121	91.0	72.8	58.2	273	182	137	109	91.0	68.3	54.6	43.7
	1.5	UC	XC	2.23	446	297	223	178	149	112	89.2	71.4	335	223	167	134	112	83.6	66.9	53.5
	2.0	XC	XC	2.57	514	343	257	206	171	129	103	82.2	386	257	193	154	129	96.4	77.1	61.7
	2.5	XC	VC	2.88	576	384	288	230	192	144	115	92.2	432	288	216	173	144	108	86.4	69.1
TF-15	1.0	UC	UC	2.28	456	304	228	182	152	114	91.2	73.0	342	228	171	137	114	85.5	68.4	54.7
	1.5	UC	XC	2.79	558	372	279	223	186	140	112	89.3	419	279	209	167	140	105	83.7	67.0
	2.0	XC	XC	3.22	644	429	322	258	215	161	129	103	483	322	242	193	161	121	96.6	77.3
	2.5	XC	VC	3.60	720	480	360	288	240	180	144	115	540	360	270	216	180	135	108	86.4
TF-17.5	1.0	UC	UC	3.42	684	456	342	274	228	171	137	109	513	342	257	205	171	128	103	82.1
	1.5	UC	XC	4.19	838	559	419	335	279	210	168	134	629	419	314	251	210	157	126	101
	2.0	XC	XC	4.84	968	645	484	387	323	242	194	155	726	484	363	290	242	182	145	116
	2.5	XC	VC	5.41	1082	721	541	433	361	271	216	173	812	541	406	325	271	203	162	130
TF-110	1.0	UC	UC	4.56	912	608	456	365	304	228	182	146	684	456	342	274	228	171	137	109
	1.5	UC	XC	5.58	1116	744	558	446	372	279	223	179	837	558	419	335	279	209	167	134
	2.0	XC	XC	6.45	1290	860	645	516	430	323	258	206	968	645	484	387	323	242	194	155
	2.5	XC	VC	7.21	1442	961	721	577	481	361	288	231	1082	721	541	433	361	270	216	173
3.0	VC	VC	7.90	1580	1053	790	632	527	395	316	253	1185	790	593	474	395	296	237	190	

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information. †Specify material.

## QCT CAM LEVER COUPLING ADAPTER

- Provides easy changeover from high capacity to lower capacity nozzles.
- Adapter fits standard 3/4" cam lever coupling.
- Corrosion-resistant stainless steel and polypropylene construction.
- Rated up to 7 bar.
- Use QJT-NYB to retrofit to Quick TeeJet.



# Quick Turbo FloodJet® WIDE ANGLE FLAT SPRAY

BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**EXCELLENT**




**DRIFT CONTROL**  
**EXCELLENT**



## FEATURES

- Turbulence chamber creates a dramatic improvement in pattern uniformity.
- Pre-orifice design produces larger droplets for reduced drift.
- Large, round orifice reduces clogging.
- 32 mm diameter tip body fits into ¾" cam lever coupling.
- Grooved side molding for automatic alignment.



Nozzle can be mounted between 0° and 45°

## OPTIMUM SPRAY HEIGHT\*

HEIGHT	SPACING
100 cm	100 cm
150 cm	150 cm

\*When nozzle is mounted parallel to the ground.

## RECOMMENDED PRESSURE RANGE



1-3 bar

## MATERIALS AVAILABLE



STAINLESS STEEL

## HOW TO ORDER

Stainless Steel with VisiFlo® color-coding

**Q C T F - V S 4 0**

Tip Type

Material Code

Capacity Size



# Quick Turbo FloodJet® WIDE ANGLE FLAT SPRAY

BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 100 cm SPRAY TIP SPACING											APPLICATION RATE FOR 150 cm SPRAY TIP SPACING										
		l/ha											l/ha										
		4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	20 km/h	25 km/h	30 km/h	4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	20 km/h	25 km/h	30 km/h		
QCTF-VS15	1.0	6.84	1026	684	513	410	342	293	257	205	164	137	684	456	342	274	228	195	171	137	109	91.2	
	1.5	8.38	1257	838	629	503	419	359	314	251	201	168	838	559	419	335	279	239	210	168	134	112	
	2.0	9.67	1451	967	725	580	484	414	363	290	232	193	967	645	484	387	322	276	242	193	155	129	
	3.0	11.85	1778	1185	889	711	593	508	444	356	284	237	1185	790	593	474	395	339	296	237	190	158	
QCTF-VS20	1.0	9.12	1368	912	684	547	456	391	342	274	219	182	912	608	456	365	304	261	228	182	146	122	
	1.5	11.17	1676	1117	838	670	559	479	419	335	268	223	1117	745	559	447	372	319	279	223	179	149	
	2.0	12.90	1935	1290	968	774	645	553	484	387	310	258	1290	860	645	516	430	369	323	258	206	172	
	3.0	15.80	2370	1580	1185	948	790	677	593	474	379	316	1580	1053	790	632	527	451	395	316	253	211	
QCTF-VS30	1.0	13.67	2051	1367	1025	820	684	586	513	410	328	273	1367	911	684	547	456	391	342	273	219	182	
	1.5	16.64	2511	1674	1256	1004	837	717	628	502	402	335	1674	1116	937	670	558	478	419	335	268	223	
	2.0	19.33	2900	1933	1450	1160	967	828	725	580	464	387	1933	1289	967	773	644	552	483	387	309	258	
	3.0	23.68	3552	2368	1776	1421	1184	1015	888	710	568	474	2368	1579	1184	947	789	677	592	474	379	316	
QCTF-VS40	1.0	18.23	2735	1823	1367	1094	912	781	684	547	438	365	1823	1215	912	729	608	521	456	365	292	243	
	1.5	22.33	3350	2233	1675	1340	1117	957	837	670	536	447	2233	1489	1117	893	744	638	558	447	357	298	
	2.0	25.78	3867	2578	1934	1547	1289	1105	967	773	619	516	2578	1719	1289	1031	859	737	645	516	412	344	
	3.0	31.58	4737	3158	2369	1895	1579	1353	1184	947	758	632	3158	2105	1579	1263	1053	902	790	632	505	421	
QCTF-VS50	1.0	22.79	3419	2279	1709	1367	1140	977	855	684	547	456	2279	1519	1140	912	760	651	570	456	365	304	
	1.5	27.91	4187	2791	2093	1675	1396	1196	1047	837	670	558	2791	1861	1396	1116	930	797	698	558	447	372	
	2.0	32.23	4835	3223	2417	1934	1612	1381	1209	967	774	645	3223	2149	1612	1289	1074	921	806	645	516	430	
	3.0	39.47	5921	3947	2960	2368	1974	1692	1480	1184	947	789	3947	2631	1974	1579	1316	1128	987	789	632	526	
QCTF-VS60	1.0	27.35	4103	2735	2051	1641	1368	1172	1026	821	656	547	2735	1823	1368	1094	912	781	684	547	438	365	
	1.5	33.50	5025	3350	2513	2010	1675	1436	1256	1005	804	670	3350	2233	1675	1340	1117	957	838	670	536	447	
	2.0	38.68	5802	3868	2901	2321	1934	1658	1451	1160	928	774	3868	2579	1934	1547	1289	1105	967	774	619	516	
	3.0	47.37	7106	4737	3553	2842	2369	2030	1776	1421	1137	947	4737	3158	2369	1895	1579	1353	1184	947	758	632	
QCTF-VS80	1.0	36.46	5469	3646	2735	2188	1823	1563	1367	1094	875	729	3646	2431	1823	1458	1215	1042	912	729	583	486	
	1.5	44.65	6698	4465	3349	2679	2233	1914	1674	1340	1072	893	4465	2977	2233	1786	1488	1276	1116	893	714	595	
	2.0	51.56	7734	5156	3867	3094	2578	2210	1934	1547	1237	1031	5156	3437	2578	2062	1719	1473	1289	1031	825	687	
	3.0	63.15	9473	6315	4736	3789	3158	2706	2368	1895	1516	1263	6315	4210	3158	2526	2105	1804	1579	1263	1010	842	
QCTF-VS100	1.0	45.58	6837	4558	3419	2735	2279	1953	1709	1367	1094	912	4558	3039	2279	1823	1519	1302	1140	912	729	608	
	1.5	55.82	8373	5582	4187	3349	2791	2392	2093	1675	1340	1116	5582	3721	2791	2233	1861	1595	1396	1116	893	744	
	2.0	64.46	9669	6446	4835	3868	3223	2763	2417	1934	1547	1289	6446	4297	3223	2578	2149	1842	1612	1289	1031	859	
	3.0	78.95	11843	7895	5921	4737	3948	3384	2961	2369	1895	1579	7895	5263	3948	3158	2632	2256	1974	1579	1263	1053	
QCTF-VS120	1.0	54.69	8204	5469	4102	3281	2735	2344	2051	1641	1313	1094	5469	3646	2735	2188	1823	1563	1367	1094	875	729	
	1.5	66.98	10047	6698	5024	4019	3349	2871	2512	2009	1608	1340	6698	4465	3349	2679	2233	1914	1675	1340	1072	893	
	2.0	77.34	11601	7734	5801	4640	3867	3315	2900	2320	1856	1547	7734	5156	3867	3094	2578	2210	1934	1547	1237	1031	
	3.0	94.73	14210	9473	7105	5684	4737	4060	3552	2842	2274	1895	9473	6315	4737	3789	3158	2707	2368	1895	1516	1263	

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information.



# WIDE ANGLE FLAT SPRAY

BROADCAST NOZZLES

## RECOMMENDED PRESSURE RANGE



1–3 bar

## MATERIALS AVAILABLE



STAINLESS STEEL



STAINLESS STEEL



POLYMER



BRASS



TK-VP FloodJet



TK-VS FloodJet



(B)1/4K FloodJet  
(1/2" – 1" NPT)



QCK  
Quick FloodJet

TIP PART NO. (STRAINER MESH SIZE)	bar	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 100 cm SPRAY TIP SPACING							
			4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h
1/8K-.50 TK-.50 (100)	1.0	0.23	34.5	23.0	17.3	13.8	11.5	8.6	6.9	5.5
	1.5	0.28	42.0	28.0	21.0	16.8	14.0	10.5	8.4	6.7
	2.0	0.33	49.5	33.0	24.8	19.8	16.5	12.4	9.9	7.9
	3.0	0.40	60.0	40.0	30.0	24.0	20.0	15.0	12.0	9.6
1/8K-.75 TK-.75 (100)	1.0	0.34	51.0	34.0	25.5	20.4	17.0	12.8	10.2	8.2
	1.5	0.42	63.0	42.0	31.5	25.2	21.0	15.8	12.6	10.1
	2.0	0.48	72.0	48.0	36.0	28.8	24.0	18.0	14.4	11.5
	3.0	0.59	88.5	59.0	44.3	35.4	29.5	22.1	17.7	14.2
1/8K-1 TK-1 (100)	1.0	0.46	69.0	46.0	34.5	27.6	23.0	17.3	13.8	11.0
	1.5	0.56	84.0	56.0	42.0	33.6	28.0	21.0	16.8	13.4
	2.0	0.65	97.5	65.0	48.8	39.0	32.5	24.4	19.5	15.6
	3.0	0.80	120	80.0	60.0	48.0	40.0	30.0	24.0	19.2
1/8K-1.5 TK-1.5 (50)	1.0	0.68	102	68.0	51.0	40.8	34.0	25.5	20.4	16.3
	1.5	0.83	125	83.0	62.3	49.8	41.5	31.1	24.9	19.9
	2.0	0.96	144	96.0	72.0	57.6	48.0	36.0	28.8	23.0
	3.0	1.18	177	118	88.5	70.8	59.0	44.3	35.4	28.3
[1/8K, 1/4K, TK]-2 TK-2 (50)	1.0	0.91	137	91.0	68.3	54.6	45.5	34.1	27.3	21.8
	1.5	1.11	167	111	83.3	66.6	55.5	41.6	33.3	26.6
	2.0	1.29	194	129	96.8	77.4	64.5	48.4	38.7	31.0
	3.0	1.58	237	158	119	94.8	79.0	59.3	47.4	37.9
[1/8K, 1/4K, TK]-2.5 TK-2.5 (50)	1.0	1.14	171	114	85.5	68.4	57.0	42.8	34.2	27.4
	1.5	1.40	210	140	105	84.0	70.0	52.5	42.0	33.6
	2.0	1.61	242	161	121	96.6	80.5	60.4	48.3	38.6
	3.0	1.97	296	197	148	118	98.5	73.9	59.1	47.3
[1/8K, 1/4K, TK]-3 TK-3 (50)	1.0	1.37	206	137	103	82.2	68.5	51.4	41.1	32.9
	1.5	1.68	252	168	126	101	84.0	63.0	50.4	40.3
	2.0	1.94	291	194	146	116	97.0	72.8	58.2	46.6
	3.0	2.37	356	237	178	142	119	88.9	71.1	56.9
[1/8K, TK]-4 (50) TK-4 (50)	1.0	1.82	273	182	137	109	91.0	68.3	54.6	43.7
	1.5	2.23	335	223	167	134	112	83.6	66.9	53.5
	2.0	2.57	386	257	193	154	129	96.4	77.1	61.7
	3.0	3.15	473	315	236	189	158	118	94.5	75.6
[1/8K, 1/4K, TK]-5 TK-5 (50)	1.0	2.28	342	228	171	137	114	85.5	68.4	54.7
	1.5	2.79	419	279	209	167	140	105	83.7	67.0
	2.0	3.22	483	322	242	193	161	121	96.6	77.3
	3.0	3.95	593	395	296	237	198	148	119	94.8
[1/8K, 1/4K, TK]-7.5 TK-7.5 (50)	1.0	3.42	513	342	257	205	171	128	103	82.1
	1.5	4.19	629	419	314	251	210	157	126	101
	2.0	4.84	726	484	363	290	242	182	145	116
	3.0	5.92	888	592	444	355	296	222	178	142
[1/8K, 1/4K, TK]-10 TK-10 (50)	1.0	4.56	684	456	342	274	228	171	137	109
	1.5	5.58	837	558	419	335	279	209	167	134
	2.0	6.45	968	645	484	387	323	242	194	155
	3.0	7.90	1185	790	593	474	395	296	237	190
[1/8K, 1/4K]-12 TK-12	1.0	5.47	821	547	410	328	274	205	164	131
	1.5	6.70	1005	670	503	402	335	251	201	161
	2.0	7.74	1161	774	581	464	387	290	232	186
	3.0	9.47	1421	947	710	568	474	355	284	227
[1/8K, 1/4K]-15 TK-15	1.0	6.84	1026	684	513	410	342	257	205	164
	1.5	8.38	1257	838	629	503	419	314	251	201
	2.0	9.67	1451	967	725	580	484	363	290	232
	3.0	11.8	1770	1180	885	708	590	443	354	283
[1/8K, 1/4K]-18 TK-18	1.0	8.20	1230	820	615	492	410	308	246	197
	1.5	10.0	1500	1000	750	600	500	375	300	240
	2.0	11.6	1740	1160	870	696	580	435	348	278
	3.0	14.2	2130	1420	1065	852	710	533	426	341
[1/8K, 1/4K]-20 TK-20	1.0	9.12	1368	912	684	547	456	342	274	219
	1.5	11.2	1680	1120	840	672	560	420	336	269
	2.0	12.9	1935	1290	968	774	645	484	387	310
	3.0	15.8	2370	1580	1185	948	790	593	474	379
QCK-20	1.0	10.0	1500	1000	750	600	500	375	300	240
	1.5	12.2	1830	1220	915	732	610	458	366	293
	2.0	14.1	2115	1410	1058	846	705	529	423	338
	3.0	17.3	2595	1730	1298	1038	865	649	519	415
1/4K-22	1.0	10.9	1635	1090	818	654	545	409	327	262
	1.5	13.3	1995	1330	998	798	665	499	399	319
	2.0	15.4	2310	1540	1155	924	770	578	462	370
	3.0	18.9	2835	1890	1418	1134	945	709	567	454

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information. Other spray angles, capacities, and materials may be available. See your TeeJet Dealer or [www.teejet.com](http://www.teejet.com) for more information. (B) = BSPT Thread

## HOW TO ORDER

Stainless Steel  
with VisiFlo® color-coding

Q C K - S S 1 0 0

Tip Type                      Material Code                      Capacity Size

T K - V S 5

Tip Type                      Material Code                      Capacity Size

Polymer with VisiFlo color-coding

T K - V P 3

Tip Type                      Material Code                      Capacity Size

Brass

( B ) 1 / 4 K - 5

BSPT Thread                      Tip Type                      Capacity Size

Stainless Steel

( B ) 1 / 8 K - S S 5

BSPT Thread                      Tip Type                      Material Code                      Capacity Size

# FloodJet® WIDE ANGLE FLAT SPRAY

TIP PART NO.	⌚ bar	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 150 cm SPRAY TIP SPACING							
			4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h
1/4K-27	1.0	12.3	1230	820	615	492	410	308	246	197
	1.5	15.1	1510	1007	755	604	503	378	302	242
	2.0	17.4	1740	1160	870	696	580	435	348	278
	3.0	21.3	2130	1420	1065	852	710	533	426	341
3/8K-30 TK-30	1.0	13.7	1370	913	685	548	457	343	274	219
	1.5	16.8	1680	1120	840	672	560	420	336	269
	2.0	19.4	1940	1293	970	776	647	485	388	310
	3.0	23.7	2370	1580	1185	948	790	593	474	379
3/8K-35	1.0	16.0	1600	1067	800	640	533	400	320	256
	1.5	19.6	1960	1307	980	784	653	490	392	314
	2.0	22.6	2260	1507	1130	904	753	565	452	362
	3.0	27.7	2770	1847	1385	1108	923	693	554	443
[3/8K, 1/2K]-40	1.0	18.2	1820	1213	910	728	607	455	364	291
	1.5	22.3	2230	1487	1115	892	743	558	446	357
	2.0	25.7	2570	1713	1285	1028	857	643	514	411
	3.0	31.5	3150	2100	1575	1260	1050	788	630	504
3/8K-45	1.0	20.5	2050	1367	1025	820	683	513	410	328
	1.5	25.1	2510	1673	1255	1004	837	628	502	402
	2.0	29.0	2900	1933	1450	1160	967	725	580	464
	3.0	35.5	3550	2367	1775	1420	1183	888	710	568
1/2K-50	1.0	22.8	2280	1520	1140	912	760	570	456	365
	1.5	27.9	2790	1860	1395	1116	930	698	558	446
	2.0	32.2	3220	2147	1610	1288	1073	805	644	515
	3.0	39.5	3950	2633	1975	1580	1317	988	790	632
1/2K-60	1.0	27.3	2730	1820	1365	1092	910	683	546	437
	1.5	33.4	3340	2227	1670	1336	1113	835	668	534
	2.0	38.6	3860	2573	1930	1544	1287	965	772	618
	3.0	47.3	4730	3153	2365	1892	1577	1183	946	757
1/2K-70	1.0	31.9	3190	2127	1595	1276	1063	798	638	510
	1.5	39.1	3910	2607	1955	1564	1303	978	782	626
	2.0	45.1	4510	3007	2255	1804	1503	1128	902	722
	3.0	55.3	5530	3687	2765	2212	1843	1383	1106	885
[1/2K, 3/4K]-80	1.0	36.5	3650	2433	1825	1460	1217	913	730	584
	1.5	44.7	4470	2980	2235	1788	1490	1118	894	715
	2.0	51.6	5160	3440	2580	2064	1720	1290	1032	826
	3.0	63.2	6320	4213	3160	2528	2107	1580	1264	1011
[1/2K, 3/4K]-90	1.0	41.0	4100	2733	2050	1640	1367	1025	820	656
	1.5	50.2	5020	3347	2510	2008	1673	1255	1004	803
	2.0	58.0	5800	3867	2900	2320	1933	1450	1160	928
	3.0	71.0	7100	4733	3550	2840	2367	1775	1420	1136
3/4K-100	1.0	45.6	4560	3040	2280	1824	1520	1140	912	730
	1.5	55.8	5580	3720	2790	2232	1860	1395	1116	893
	2.0	64.5	6450	4300	3225	2580	2150	1613	1290	1032
	3.0	79.0	7900	5267	3950	3160	2633	1975	1580	1264
3/4K-110	1.0	50.1	5010	3340	2505	2004	1670	1253	1002	802
	1.5	61.4	6140	4093	3070	2456	2047	1535	1228	982
	2.0	70.9	7090	4727	3545	2836	2363	1773	1418	1134
	3.0	86.8	8680	5787	4340	3472	2893	2170	1736	1389
[1/2K, 3/4K]-120	1.0	54.7	5470	3647	2735	2188	1823	1368	1094	875
	1.5	67.0	6700	4467	3350	2680	2233	1675	1340	1072
	2.0	77.4	7740	5160	3870	3096	2580	1935	1548	1238
	3.0	94.7	9470	6313	4735	3788	3157	2368	1894	1515
3/4K-140	1.0	63.8	6380	4253	3190	2552	2127	1595	1276	1021
	1.5	78.1	7810	5207	3905	3124	2603	1953	1562	1250
	2.0	90.2	9020	6013	4510	3608	3007	2255	1804	1443
	3.0	111	11100	7400	5550	4440	3700	2775	2220	1776
QCK-150	1.0	68.4	6840	4560	3420	2736	2280	1710	1368	1094
	1.5	83.8	8380	5587	4190	3352	2793	2095	1676	1341
	2.0	96.7	9670	6447	4835	3868	3223	2418	1934	1547
	3.0	118	11800	7867	5900	4720	3933	2950	2360	1888
3/4K-160	1.0	72.9	7290	4860	3645	2916	2430	1823	1458	1166
	1.5	89.3	8930	5953	4465	3572	2977	2233	1786	1429
	2.0	103	10300	6867	5150	4120	3433	2575	2060	1648
	3.0	126	12600	8400	6300	5040	4200	3150	2520	2016
3/4K-180	1.0	82.0	8200	5467	4100	3280	2733	2050	1640	1312
	1.5	100	10000	6667	5000	4000	3333	2500	2000	1600
	2.0	116	11600	7733	5800	4640	3867	2900	2320	1856
	3.0	142	14200	9467	7100	5680	4733	3550	2840	2272
3/4K-210	1.0	95.7	9570	6380	4785	3828	3190	2393	1914	1531
	1.5	117	11700	7800	5850	4680	3900	2925	2340	1872
	2.0	135	13500	9000	6750	5400	4500	3375	2700	2160
	3.0	166	16600	11067	8300	6640	5533	4150	3320	2656

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information. Other spray angles, capacities, and materials may be available. See your TeeJet Dealer or [www.teejet.com](http://www.teejet.com) for more information.



## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**EXCELLENT**  
SYSTEMIC  
**EXCELLENT**



**FERTILIZER**  
BROADCAST  
**EXCELLENT**



**DRIFT CONTROL**  
**EXCELLENT**



### FEATURES


- Very large droplets.
- More precise flow and distribution pattern.
- Large orifice reduces clogging.
- 1/4TTJ(VS) is available in seven VisiFlo® capacities (02 to 15) and 1/4TTJ(VP) is available in four VisiFlo capacities (06 to 15).

### QJ4676-90-1/4-NYR


- 90° fitting attaches to Quick TeeJet bodies—1/4" female threaded outlet.
- Simple installation of TurfJet nozzles on vertical nozzle bodies.
- Nylon construction.



### SPRAY PATTERN



### DROPLET SIZE CLASSIFICATION



### OPTIMUM SPRAY HEIGHT

HEIGHT	SPACING
60 cm*	50 cm
75 cm*	75 cm
100 cm*	100 cm

\*Wide angle spray nozzle height is influenced by nozzle orientation. The critical factor is to achieve a minimum 30% overlap.

### RECOMMENDED PRESSURE RANGE



### MATERIALS AVAILABLE

**VP** POLYMER

**VS** STAINLESS STEEL

### HOW TO ORDER

Stainless Steel with VisiFlo color-coding

1 / 4 T T J 0 4 - V S

Tip Type

Capacity Size

Material Code

Polymer with VisiFlo color-coding

1 / 4 T T J 0 6 - V P

Tip Type

Capacity Size

Material Code

TIP PART NO. (STRAINER MESH SIZE)	bar	DROP SIZE	CAPACITY ONE NOZZLE IN l/min	APPLICATION RATE FOR 100 cm SPRAY TIP SPACING												
				l/ha												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h	30 km/h	35 km/h
1/4TTJ02 (50)	1.5	UC	0.56	84.0	67.2	56.0	48.0	42.0	37.3	33.6	28.0	21.0	16.8	13.4	11.2	9.6
	2.0	XC	0.65	97.5	78.0	65.0	55.7	48.8	43.3	39.0	32.5	24.4	19.5	15.6	13.0	11.1
	3.0	XC	0.79	119	94.8	79.0	67.7	59.3	52.7	47.4	39.5	29.6	23.7	19.0	15.8	13.5
	4.0	VC	0.91	137	109	91.0	78.0	68.3	60.7	54.6	45.5	34.1	27.3	21.8	18.2	15.6
	5.0	VC	1.02	153	122	102	87.4	76.5	68.0	61.2	51.0	38.3	30.6	24.5	20.4	17.5
1/4TTJ04 (50)	1.5	UC	1.12	168	134	112	96.0	84.0	74.7	67.2	56.0	42.0	33.6	26.9	22.4	19.2
	2.0	UC	1.29	194	155	129	111	96.8	86.0	77.4	64.5	48.4	38.7	31.0	25.8	22.1
	3.0	UC	1.58	237	190	158	135	119	105	94.8	79.0	59.3	47.4	37.9	31.6	27.1
	4.0	UC	1.82	273	218	182	156	137	121	109	91.0	68.3	54.6	43.7	36.4	31.2
	5.0	UC	2.04	306	245	204	175	153	136	122	102	76.5	61.2	49.0	40.8	35.0
1/4TTJ05 (50)	1.5	UC	1.39	209	167	139	119	104	92.7	83.4	69.5	52.1	41.7	33.4	27.8	23.8
	2.0	UC	1.61	242	193	161	138	121	107	96.6	80.5	60.4	48.3	38.6	32.2	27.6
	3.0	UC	1.97	296	236	197	169	148	131	118	98.5	73.9	59.1	47.3	39.4	33.8
	4.0	UC	2.27	341	272	227	195	170	151	136	114	85.1	68.1	54.5	45.4	38.9
	5.0	UC	2.54	381	305	254	218	191	169	152	127	95.3	76.2	61.0	50.8	43.5
1/4TTJ06 (50)	1.5	UC	1.68	252	202	168	144	126	112	101	84.0	63.0	50.4	40.3	33.6	28.8
	2.0	UC	1.94	291	233	194	166	146	129	116	97.0	72.8	58.2	46.6	38.8	33.3
	3.0	UC	2.37	356	284	237	203	178	158	142	119	88.9	71.1	56.9	47.4	40.6
	4.0	UC	2.74	411	329	274	235	206	183	164	137	103	82.2	65.8	54.8	47.0
	5.0	UC	3.06	459	367	306	262	230	204	184	153	115	91.8	73.4	61.2	52.5
1/4TTJ08	1.5	UC	2.23	335	268	223	191	167	149	134	112	83.6	66.9	53.5	44.6	38.2
	2.0	UC	2.58	387	310	258	221	194	172	155	129	96.8	77.4	61.9	51.6	44.2
	3.0	UC	3.16	474	379	316	271	237	211	190	158	119	94.8	75.8	63.2	54.2
	4.0	UC	3.65	548	438	365	313	274	243	219	183	137	110	87.6	73.0	62.6
	5.0	UC	4.08	612	490	408	350	306	272	245	204	153	122	97.9	81.6	69.9
1/4TTJ10	1.5	UC	2.79	419	335	279	239	209	186	167	140	105	83.7	67.0	55.8	47.8
	2.0	UC	3.23	485	388	323	277	242	215	194	162	121	96.9	77.5	64.6	55.4
	3.0	UC	3.95	593	474	395	339	296	263	237	198	148	119	94.8	79.0	67.7
	4.0	UC	4.56	684	547	456	391	342	304	274	228	171	137	109	91.2	78.2
	5.0	UC	5.10	765	612	510	437	383	340	306	255	191	153	122	102	87.4
1/4TTJ15	1.5	UC	4.19	629	503	419	359	314	279	251	210	157	126	101	83.8	71.8
	2.0	UC	4.83	725	580	483	414	362	322	290	242	181	145	116	96.6	82.8
	3.0	UC	5.92	888	710	592	507	444	395	355	296	222	178	142	118	101
	4.0	UC	6.84	1026	821	684	586	513	456	410	342	257	205	164	137	117
	5.0	UC	7.64	1146	917	764	655	573	509	458	382	287	229	183	153	131

**Note:** Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to change. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for droplet size classification, useful formulas and other technical information.

# FullJet® WIDE ANGLE FULL CONE SPRAY

BROADCAST NOZZLES

## Typical Applications



**HERBICIDE**  
SOIL APPLIED  
**EXCELLENT**  
SYSTEMIC  
**EXCELLENT**



**FUNGICIDE**  
SYSTEMIC  
**EXCELLENT**



**INSECTICIDE**  
SYSTEMIC  
**EXCELLENT**



**FERTILIZER**  
BROADCAST  
**EXCELLENT**




**DRIFT CONTROL**  
**VERY GOOD**




## FEATURES

- Large droplets to reduce drift.
- Wide spray angle up to 120° allows use on 100 cm spacing.
- Can be used with 11445A\*-CEL for Quick TeeJet® connection. Reference page 118 for more information.

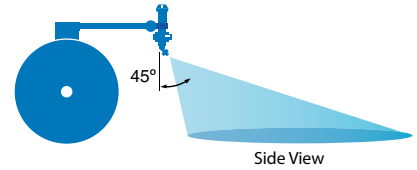

## SPRAY PATTERN



## OPTIMUM SPRAY HEIGHT

HEIGHT	SPACING
50 cm*	50 cm
75 cm*	75 cm
100 cm*	100 cm

FullJet nozzles should be angled 30°–45° from vertical for uniform spray distribution.

\*Wide angle spray nozzle height is influenced by nozzle orientation. The critical factor is to achieve a minimum 30% overlap.

## RECOMMENDED PRESSURE RANGE



1–3 bar

## MATERIALS AVAILABLE

**VS** STAINLESS STEEL

## HOW TO ORDER

Stainless Steel with VisiFlo® color-coding

**F L - 5 V S**

Tip Type Capacity Size Material Code

Celcon with Stainless Steel vane and VisiFlo color-coding

**F L - 5 V C**


Tip Type Capacity Size Material Code

# FullJet® WIDE ANGLE FULL CONE SPRAY

BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING						APPLICATION RATE FOR 100 cm SPRAY TIP SPACING					
			l/ha						l/ha					
			4 km/h	6 km/h	8 km/h	10 km/h	15 km/h	20 km/h	4 km/h	6 km/h	8 km/h	10 km/h	15 km/h	20 km/h
FL-5	1.0	1.19	357	238	179	143	95	71	179	119	89	71	48	36
	1.5	1.43	429	286	215	172	114	86	215	143	107	86	57	43
	2.0	1.69	507	338	254	203	135	101	254	169	127	101	68	51
	2.5	1.81	543	362	272	217	145	109	272	181	136	109	72	54
	3.0	1.97	591	394	296	236	158	118	296	197	148	118	79	59
FL-6.5	1.0	1.56	468	312	234	187	125	94	234	156	117	94	62	47
	1.5	1.89	567	378	284	227	151	113	284	189	142	113	76	57
	2.0	2.14	642	428	321	257	171	128	321	214	161	128	86	64
	2.5	2.34	702	468	351	281	187	140	351	234	176	140	94	70
	3.0	2.56	768	512	384	307	205	154	384	256	192	154	102	77
FL-8	1.0	1.90	570	380	285	228	152	114	285	190	143	114	76	57
	1.5	2.29	687	458	344	275	183	137	344	229	172	137	92	69
	2.0	2.60	780	520	390	312	208	156	390	260	195	156	104	78
	2.5	2.89	867	578	434	347	231	173	434	289	217	173	116	87
	3.0	3.15	945	630	473	378	252	189	473	315	236	189	126	95
FL-10	1.0	2.37	711	474	356	284	190	142	356	237	178	142	95	71
	1.5	2.86	858	572	429	343	229	172	429	286	215	172	114	86
	2.0	3.39	1017	678	509	407	271	203	509	339	254	203	136	102
	2.5	3.62	1086	724	543	434	290	217	543	362	272	217	145	109
	3.0	3.93	1179	786	590	472	314	236	590	393	295	236	157	118
FL-15	1.0	3.56	1068	712	534	427	285	214	534	356	267	214	142	107
	1.5	4.29	1287	858	644	515	343	257	644	429	322	257	172	129
	2.0	4.84	1452	968	726	581	387	290	726	484	363	290	194	145
	2.5	5.43	1629	1086	815	652	434	326	815	543	407	326	217	163
	3.0	5.90	1770	1180	885	708	472	354	885	590	443	354	236	177

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information.

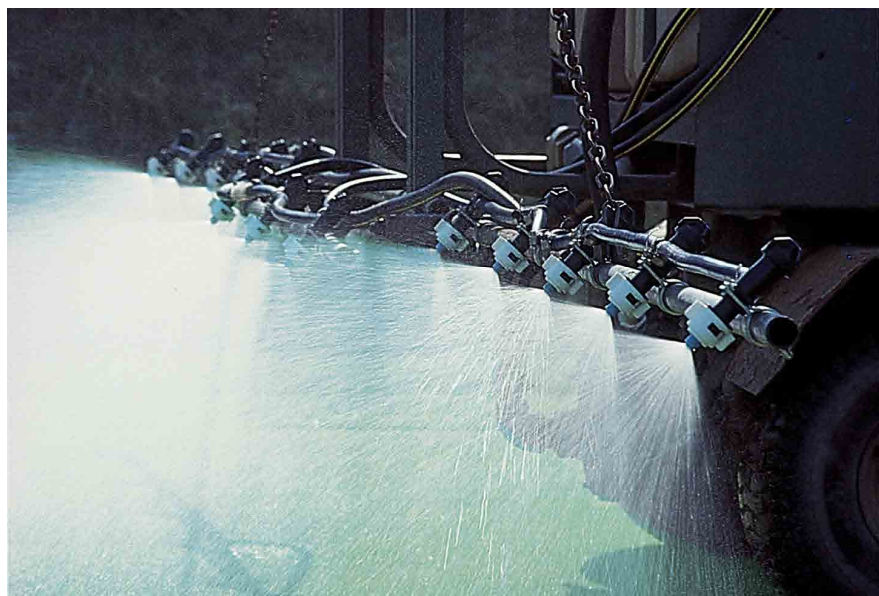


# TeeJet® DOUBLE OUTLET FLAT SPRAY

BROADCAST NOZZLES

## 150° SERIES STAINLESS STEEL AND BRASS

Suggested for post-directed application with hose drops.

### SPRAY PATTERN

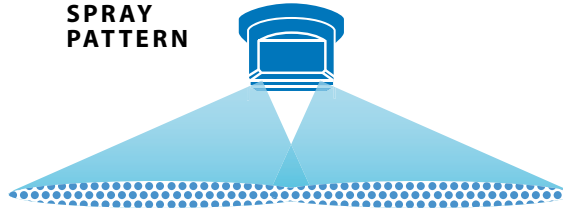

TIP PART NO. (STRAINER MESH SIZE)	bar	CAPACITY ONE TIP IN l/min	APPLICATION RATE FOR 50 cm SPRAY TIP SPACING							
			l/ha							
			4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h
TQ150-01-SS (100)	1.5	0.28	84.0	56.0	42.0	33.6	28.0	24.0	21.0	18.7
	2.0	0.32	96.0	64.0	48.0	38.4	32.0	27.4	24.0	21.3
	2.5	0.36	108	72.0	54.0	43.2	36.0	30.9	27.0	24.0
	3.0	0.39	117	78.0	58.5	46.8	39.0	33.4	29.3	26.0
	3.5	0.42	126	84.0	63.0	50.4	42.0	36.0	31.5	28.0
TQ150-015-SS (100)	1.5	0.42	126	84.0	63.0	50.4	42.0	36.0	31.5	28.0
	2.0	0.48	144	96.0	72.0	57.6	48.0	41.1	36.0	32.0
	2.5	0.54	162	108	81.0	64.8	54.0	46.3	40.5	36.0
	3.0	0.59	177	118	88.5	70.8	59.0	50.6	44.3	39.3
	3.5	0.64	192	128	96.0	76.8	64.0	54.9	48.0	42.7
TQ150-02-SS (100)	1.5	0.56	168	112	84.0	67.2	56.0	48.0	42.0	37.3
	2.0	0.65	195	130	97.5	78.0	65.0	55.7	48.8	43.3
	2.5	0.72	216	144	108	86.4	72.0	61.7	54.0	48.0
	3.0	0.79	237	158	119	94.8	79.0	67.7	59.3	52.7
	3.5	0.85	255	170	128	102	85.0	72.9	63.8	56.7
TQ150-03-SS (100)	1.5	0.83	249	166	125	99.6	83.0	71.1	62.3	55.3
	2.0	0.96	288	192	144	115	96.0	82.3	72.0	64.0
	2.5	1.08	324	216	162	130	108	92.6	81.0	72.0
	3.0	1.18	354	236	177	142	118	101	88.5	78.7
	3.5	1.27	381	254	191	152	127	109	95.3	84.7
TQ150-04-SS (50)	1.5	1.12	336	224	168	134	112	96.0	84.0	74.7
	2.0	1.29	387	258	194	155	129	111	96.8	86.0
	2.5	1.44	432	288	216	173	144	123	108	96.0
	3.0	1.58	474	316	237	190	158	135	119	105
	3.5	1.71	513	342	257	205	171	147	128	114
TQ150-05-SS (50)	1.5	1.39	417	278	209	167	139	119	104	92.7
	2.0	1.61	483	322	242	193	161	138	121	107
	2.5	1.80	540	360	270	216	180	154	135	120
	3.0	1.97	591	394	296	236	197	169	148	131
	3.5	2.13	639	426	320	256	213	183	160	142
TQ150-06-SS (50)	1.5	1.68	504	336	252	202	168	144	126	112
	2.0	1.94	582	388	291	233	194	166	146	129
	2.5	2.16	648	432	324	259	216	185	162	144
	3.0	2.37	711	474	356	284	237	203	178	158
	3.5	2.56	768	512	384	307	256	219	192	171
TQ150-08-SS (50)	1.5	2.23	669	446	335	268	223	191	167	149
	2.0	2.58	774	516	387	310	258	221	194	172
	2.5	2.88	864	576	432	346	288	247	216	192
	3.0	3.16	948	632	474	379	316	271	237	211
	3.5	3.41	1023	682	512	409	341	292	256	227
TQ150-09-SS (50)	1.5	2.51	753	502	377	301	251	215	188	167
	2.0	2.90	870	580	435	348	290	249	218	193
	2.5	3.24	972	648	486	389	324	278	243	216
	3.0	3.55	1065	710	533	426	355	304	266	237
	3.5	3.83	1149	766	575	460	383	328	287	255

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information.

### RECOMMENDED PRESSURE RANGE



1.5–3.5 bar

### MATERIALS AVAILABLE



STAINLESS STEEL



BRASS

### HOW TO ORDER

Stainless Steel

T Q 1 5 0 - 0 3 - S S

Tip Type

Capacity  
Size

Material  
Code

Brass

T Q 1 5 0 - 0 1

Tip Type


Capacity  
Size



## OFF-CENTER FLAT SPRAY (SMALLER CAPACITIES)

TeeJet Off-Center spray tips are commonly installed in double and single swivel nozzle bodies. Because these bodies are adjustable for angular position, a wide spray swath is easily obtained.

See page 140 for swivels and hose drops.

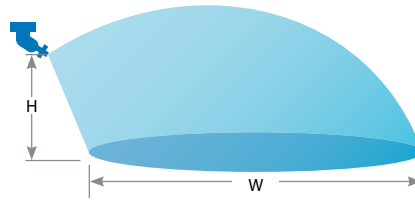

BROADCAST NOZZLES

TIP PART NO. (STRAINER MESH SIZE)	bar	CAPACITY ONE TIP IN l/min	HEIGHT = 45 cm					HEIGHT = 60 cm				
			"W" cm	l/ha				"W" cm	l/ha			
				4 km/h	6 km/h	8 km/h	10 km/h		4 km/h	6 km/h	8 km/h	10 km/h
OC-01 (100)	2.0	0.32	147	32.7	21.8	16.3	13.1	165	29.1	19.4	14.5	11.6
	3.0	0.39	152	38.5	25.7	19.2	15.4	170	34.4	22.9	17.2	13.8
	4.0	0.45	157	43.0	28.7	21.5	17.2	175	38.6	25.7	19.3	15.4
OC-02 (50)	2.0	0.65	172	56.7	37.8	28.3	22.7	190	51.3	34.2	25.7	20.5
	3.0	0.79	177	66.9	44.6	33.5	26.8	195	60.8	40.5	30.4	24.3
	4.0	0.91	182	75.0	50.0	37.5	30.0	198	68.9	46.0	34.5	27.6
OC-03 (50)	2.0	0.96	195	73.8	49.2	36.9	29.5	203	70.9	47.3	35.5	28.4
	3.0	1.18	203	87.2	58.1	43.6	34.9	210	84.3	56.2	42.1	33.7
	4.0	1.36	208	98.1	65.4	49.0	39.2	215	94.9	63.3	47.4	38.0
OC-04 (50)	2.0	1.29	231	83.8	55.8	41.9	33.5	236	82.0	54.7	41.0	32.8
	3.0	1.58	236	100	66.9	50.2	40.2	238	99.6	66.4	49.8	39.8
	4.0	1.82	238	115	76.5	57.4	45.9	241	113	75.5	56.6	45.3
OC-06 (50)	2.0	1.94	251	116	77.3	58.0	46.4	274	106	70.8	53.1	42.5
	3.0	2.37	256	139	92.6	69.4	55.5	279	127	84.9	63.7	51.0
	4.0	2.74	259	159	106	79.3	63.5	281	146	97.5	73.1	58.5
OC-08 (50)	2.0	2.58	254	152	102	76.2	60.9	279	139	92.5	69.4	55.5
	3.0	3.16	259	183	122	91.5	73.2	284	167	111	83.5	66.8
	4.0	3.65	264	207	138	104	83.0	287	191	127	95.4	76.3
OC-12	2.0	3.87	259	224	149	112	89.7	287	202	135	101	80.9
	3.0	4.74	264	269	180	135	108	292	243	162	122	97.4
	4.0	5.47	266	308	206	154	123	294	279	186	140	112
OC-16	2.0	5.16	335	231	154	116	92.4	360	215	143	108	86.0
	3.0	6.32	350	271	181	135	108	370	256	171	128	102
	4.0	7.30	363	302	201	151	121	375	292	195	146	117

**Note:** Always double check your application rates. Tabulations are based on spraying water at 21°C. See technical information (pages 179–202) for useful formulas and other technical information.

### RECOMMENDED PRESSURE RANGE



2–4 bar

### MATERIALS AVAILABLE



STAINLESS STEEL



BRASS

### HOW TO ORDER

Brass

OC - 0 2

Tip Type

Capacity Size

Stainless Steel

OC - S S 0 6

Tip Type

Material Code

Capacity Size