


# Nozzles

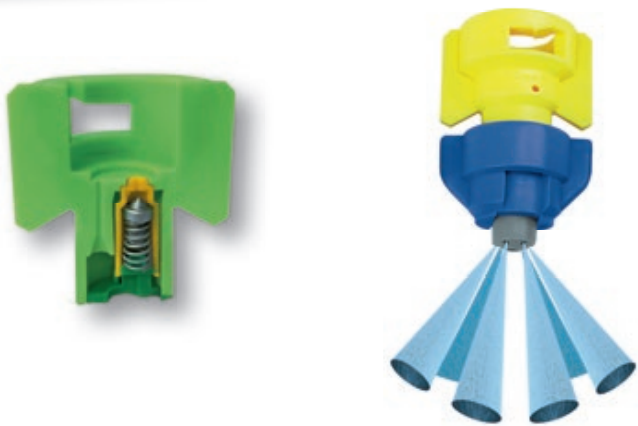

## TurboDrop® VR MK III ESI

6-stream liquid fertilizer spray nozzle  
for variable flow rates


Sizes	Recommended strainer*	Nozzle order no.
■ VR 1.5	50 M blue	17157
■ VR 2	50 M blue	17158
■ VR 3	50 M blue	17159
■ VR 5	50 M blue	17160



### Specifications



**Pressure range**  
2 – 8 bar



**Optimum spray height**  
60 cm

**Optimum pressure**  
3 – 7 bar

**Typical application**



### Features

- Integral bypass valve increases flow rate options
- Replaces up to three 6-stream AlbuZ® ESI sizes
- Significantly lower priced and more compact than automatic nozzle change systems
- Continuous flow rate variation eliminates dosing errors by incremental flow rate changes
- Suitable for applications where rates are changed frequently
- Large and soft droplets minimize risk of chemical burn
- Six spray jets

\* To be used with strainer F 50 M blue, order no. 16609

For litre/ha rates, see the tables on page 70.

For application rate formulas, see page 71.

Supplied with standard 3mm sealing ring (charged extra).